




## SA600 空气净化器

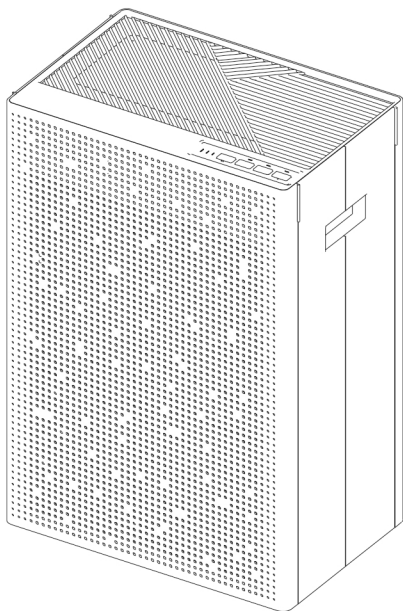

洁净空气，自由呼吸。  
Freedom to Breathe Clean Air.

## 请阅读并保存以下说明事项

警告——为减少火灾、触电或人身伤害的风险，请遵守以下规定：

- 在使用设备之前，请阅读所有说明。
- 请按照制造商规定的方式使用本产品。如有疑问，请联系制造商。
- 在维修或清洁设备之前，请关闭电源并拔下外接电源插头，防止意外接通电源。如果不能切断电源，应在电源插座上安装一个明显的警告标识。
- 为了预防电气事故，请勿将设备浸入水中或其他液体中。请不要在潮湿环境中使用此设备。
- 请在关机状态下更换滤网或清洁空气净化器。请在移动设备前拔下电源插头。断电时请拔插头，不要拉拽电源线。
- 请勿将任何物体掉入或插入本设备的任何开口。
- 请勿在地毯下铺设电线，或用地毯、垫子等类似物品覆盖电线。请勿将电线铺设在家具或电器下面。请将电线铺设在远离活动区域和不会被绊倒的地方。
- 请勿用损坏的电线或插头接通任何电器。如有损坏，请丢弃设备或送回授权的服务机构进行检查或维修。
- 本设备仅适用于本手册中描述的家庭用途。任何未经制造商推荐的其他用途都可能导致火灾、电击或人身伤害。
- 切勿在设备顶部放置任何东西。
- 请勿试图修理或调整本设备的任何电气功能或机械功能。本设备内部不包含用户可维修的部件。所有维修只能由专业人员进行。若自行修理，保修将会失效。
- 警告：为减少火灾或电击风险，请勿将本净化器与任何固态速度控制装置一起使用。

# 可靠的空气净化工具

对于SA600，我们的预想是要制造一款为教室、办公室和客厅等大空间提供安全、干净空气的可信赖的净化器。

SA600滤网数量更多，减小噪音的同时提高了空气净化效率。在Smart Air超过10年研究和经验的基础上不断完善，我们终于迎来了这款性价比更高的净化器——SA600。



## SA600产品亮点


六片滤网结构、双侧进风，加倍净化效率、降低滤网更换成本  
前过滤网-活性炭滤网-HEPA滤网组合，提供全方位保护  
低噪音设计，伴您好眠

免打扰模式：提示灯光3分钟自动熄灭

童锁模式：避免运行过程中误触带来的安全隐患

操作键凸点标识：无障碍操作更友善

节能低功率，24小时开启不费电

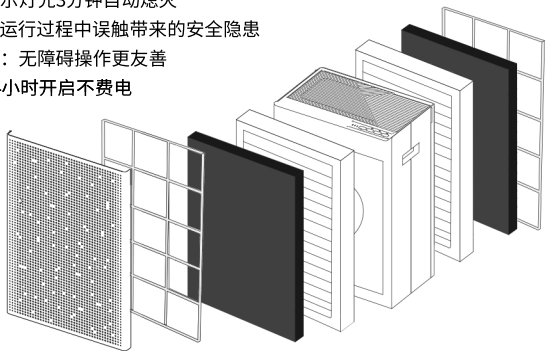


## 关于Smart Air

Smart Air是一家获得B Corp共益企业认证的小型社会企业。我们致力于研发价格实惠的空气净化器，用实验数据和科学对抗空气污染带来的危害。




# 深入了解SA600

产品示意图

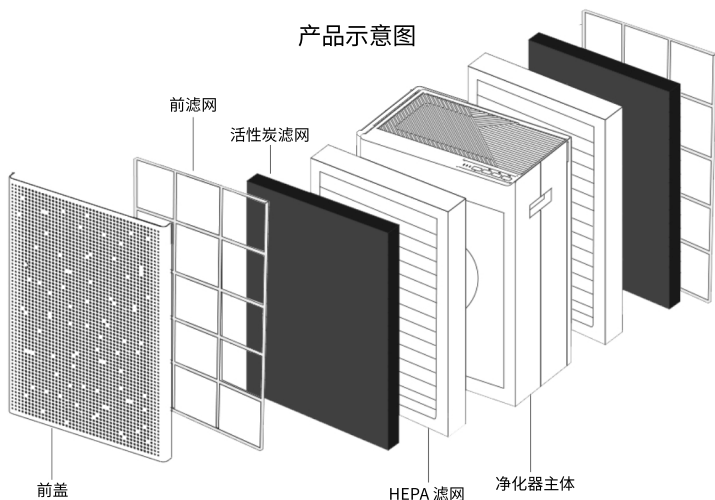

控制面板

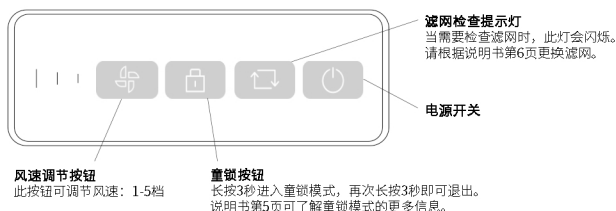


SA600有5个风速档位。可以使用【风速调节按钮】来调节风速。  
档位灯会按照下方图示显示当前选择的风速。




# 开箱和运行

按照以下步骤，启用你的SA600，呼吸清爽、干净的空气：

第1步：将SA600从包装盒中取出。取下SA600的前盖，拆除滤网包装。

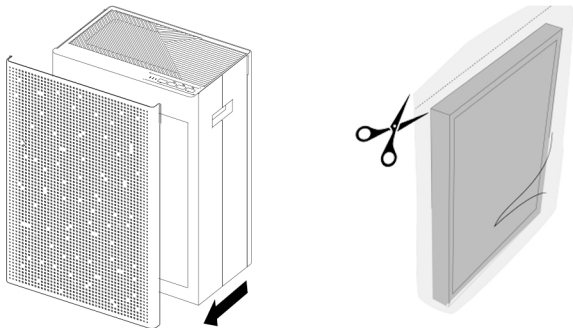

第2步：将SA600放在平整的地面上，将插头插入插座。



空气从SA600前后方向同时进入空气净化器。

为了保证空气流通畅通，应确保前后进气口与周围墙壁或家具的距离大于30厘米。

第3步：按下控制面板上的电源开关开机运行。



第一次接通电源后，按钮指示灯会亮起。  
SA600默认风扇转速为“风速1”。

# 免打扰模式

为了节能和减少控制面板灯光的干扰，SA600内置了指示灯免打扰模式。

如果3分钟内无任何操作，指示灯将熄灭；按任意按钮即可唤醒。  
当需要更换滤网时，将不再自动进入免打扰模式，直至重置滤网提示功能。

# 童锁模式

童锁模式可以锁定设备当前状态，防止使用过程中的意外操作。

**启动锁定：**长按“童锁”按钮3秒，此时“童锁”指示灯亮起。  
在此模式下，任何操作都不会改变净化器的设置，但会导致“童锁”指示灯连续闪烁。

**解除锁定：**再次长按“童锁”按钮3秒，直至指示灯停止闪烁。

---

# 清洁和保养

开始使用设备后，建议每个月对设备进行清洁和保养。  
断开电源，用干燥的抹布擦拭机身。打开两侧前盖，将两个前滤网分别拆下，水洗并晾干后再次安装。

- \* HEPA 滤网和活性炭滤网不能清洗，需定期更换。
- \* 不得自行拆开机身清洁电机，如有故障问题不提供售后服务。


---

# 产品信息 V2.0


|                           |                                          |
|---------------------------|------------------------------------------|
| 型号: SA600                 | 颗粒物CADR: 480m <sup>3</sup> /hr           |
| 尺寸: 350mm x 232mm x 510mm | 甲醛去除率: 93%                               |
| 适用面积: 35-60m <sup>2</sup> | 噪音: 16-51dB(A) (平均声压级) 28-63dB(A) (声功率级) |
| 功率: 50W                   | 材质: ABS塑料                                |
| 电压: 100-240V~             | 净重: 6.9kg                                |

# 更换滤网

1. 当滤网需要更换时，滤网检查提示灯将持续闪烁。




2. 依次取下两侧的前盖、前滤网、活性炭滤网和HEPA 滤网。



3. 拆开新滤网包装。



4. 安装新的活性炭滤网和HEPA 滤网，滤网上箭头向外以保证安装方向正确。



5. 将两侧的前盖复位后，长按滤网提示灯4秒，滤网更换提示时间将被重置，滤网检查提示灯将停止闪烁。



6. 想根据个人使用情况估算更换HEPA滤网的频率。请访问：

<https://smartairfilters.com/zh/when-change-hepa-filter/>



注：滤网检查提示灯将在净化器运行约1045小时后亮起，您可根据自己的使用情况决定是否更换滤网。当HEPA滤芯变黑时建议更换；如无需更换，可长按提示灯重置提醒。

了解更多Smart Air产品信息？


欢迎扫描二维码！



[smartairfilters.com](http://smartairfilters.com)



## SA600 Air Purifier

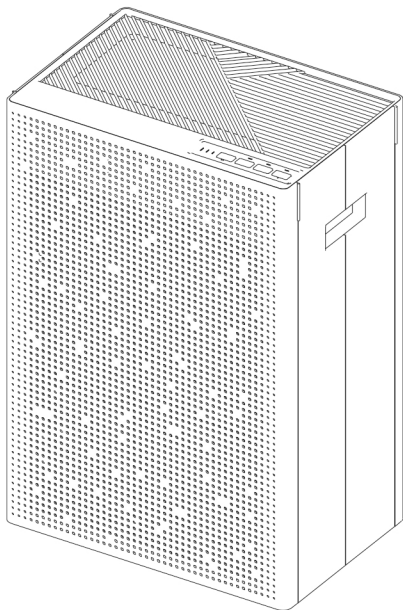

Freedom to Breathe Clean Air.

# READ AND SAVE THESE INSTRUCTIONS

WARNING – TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS, OBSERVE THE FOLLOWING:

- Read all instructions before using appliance.
- Use this unit only in the manner intended by the manufacturer. If you have questions, contact the manufacturer.
- Before servicing or cleaning unit, switch power off at service panel and lock the service disconnecting means to prevent power from being switched on accidentally. When the service disconnecting means cannot be locked, securely fasten a prominent warning device, such as a tag, to the service panel.
- To protect against electrical hazards, DO NOT immerse it in the water or other liquids. Do not use near wet area.
- Always unplug the air purifier before moving it. Change filters or clean the air purifier when it is not in use. Be sure to pull by the plug and not the cord.
- NEVER drop or insert any object into any openings of this unit.
- DO NOT run cord under carpeting. DO NOT cover cord with throw rugs, runners, or similar coverings. DO NOT route cord under furniture or appliances. Arrange cord away from traffic area and where it will not be tripped over.
- DO NOT operate any appliance with a damaged cord or plug. Discard fan or return to an authorized service facility for examination and/or repair.
- Use appliance only for intended household use as described in this manual. Any other use not recommended by the manufacturer may cause fire, electric shock or injury to persons.
- DO NOT place anything on top of unit.
- DO NOT attempt to repair or adjust any electrical or mechanical functions on this unit. Doing so will void your warranty. The inside of the unit contains no user serviceable parts. All servicing should be performed by qualified personnel only.
- Always turn off the unit before unplugging it to prevent the risk of electric shock.

- **WARNING:** To reduce the risk of fire or electric shock, do not use this fan with any solid-state speed control device.



Correct Disposal of this product

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

FCC warning:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

# High-Performance Air Purification

When designing the SA600, we wanted to make an air purifier that can reliably keep large spaces like classrooms, offices and living rooms safe and clean.


The SA600 doubles up on filters to provide more clean air at lower noise levels. Refined through Smart Air's over 10 years of research and experience, the SA600 is our most cost-effective purifier yet.



---

## Features

- Dual-inlet design for more clean air
- Pre-filter, HEPA and carbon filters for all-round protection
- Double the filters, improving effectiveness while lowering cost
- Whisper-quiet design
- 'Do not disturb' mode for silent, distraction-free operation
- Child lock to keep your SA600 operating and prevent any purifier setting from being changed
- Tactile marking is designed to enhance accessibility for visually impaired users.

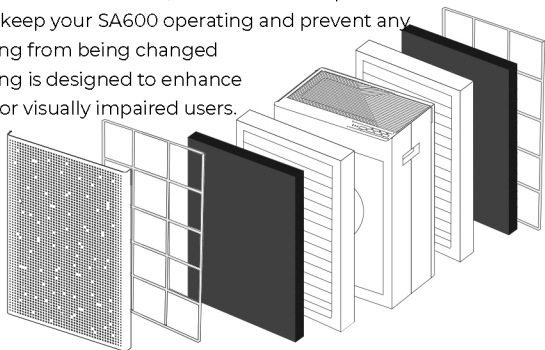

---

## About Smart Air

Smart Air is a social enterprise and certified B Corp dedicated to distributing cost-effective air purifiers and providing open-source data and science to combat the harms of air pollution.

Certified




Corporation




# Getting To Know Your SA600

## Overview of Unit

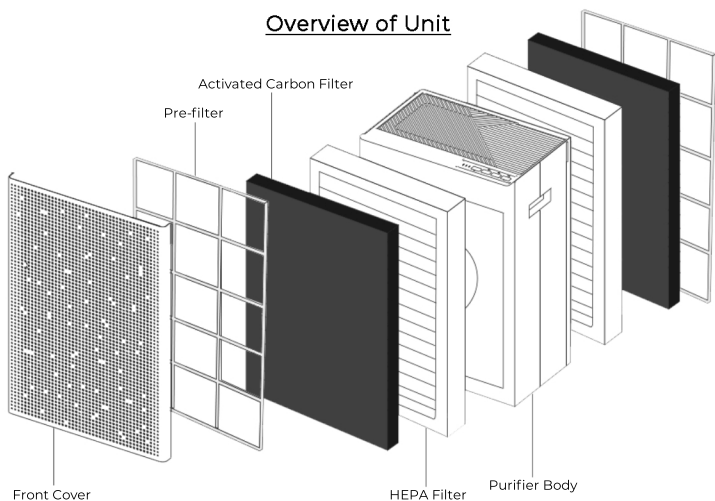

## Control Panel View

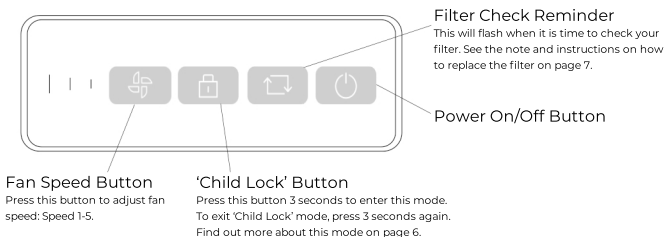


The SA600 air purifier has 5 speeds. Use the Fan Speed Button to cycle through them. The lights will light up in the following sequence, showing the current speed:




# Turning On Your SA600

Follow these steps to start breathing cool, clean air with your SA600:

**Step 1: Take the SA600 out of the box and pull off its front cover. Remove the bags from the filters.**

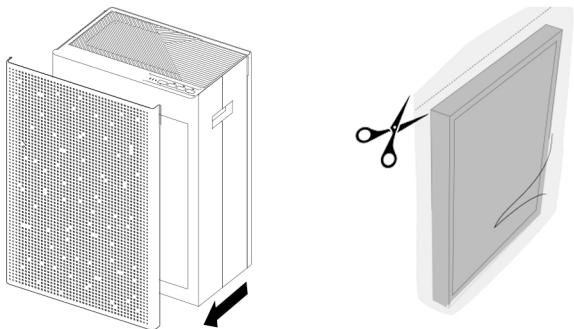

**Step 2: Place your SA600 on a firm, level and flat floor & plug the supplied power cord into an AC outlet.**



Air enters the air purifier from the front and back.  
For proper air flow, ensure the inlets (front and back) are located at least 30cm (1 ft) from any wall or item of furniture.

**Step 3: Press the Power On/Off button on the control panel to turn on.**

The indicator lights will illuminate when powered on for the first time. The SA600 defaults to the fan speed of 'Speed 1'.



## ‘Do Not Disturb’ Mode

To save energy and minimize the impact of the SA600's indicator lights on your environment, the device includes a built-in automatic ‘Do Not Disturb’ mode."

If the SA600's buttons are not touched for 3 minutes, all control lights will turn off. The next time you touch any button on the SA600, the indicator lights will turn back on, showing your previous settings.

## ‘Child Lock’ Mode

The ‘Child Lock’ mode prevents changes to purifier settings.

To enter ‘Child Lock’ mode, simply hold the ‘Child Lock’ button for 3 seconds. The ‘Child Lock’ light will then illuminate. In this mode, pressing any button will not alter the purifier's state. Pressing a button will cause the ‘Child Lock’ light to flash continuously.

To exit ‘Child Lock’ mode, hold the button for 3 seconds and the light will stop flashing.

---

## Cleaning & Maintaining Your SA600

It is recommended to clean and maintain the SA600 once a month.

Disconnect the power, wipe the body with a dry cloth, and remove the pre-filters by opening the covers. Wash, dry, and reinstall the pre-filters.

- HEPA and carbon filters cannot be washed and require regular replacement.

- Do not disassemble the device to clean the motor.

---

## Product Information v2.0

Product No.: SA600

Dimensions: 350mm x 232mm x 510mm

Recommended Coverage Area: 35-60m<sup>2</sup>

Power: 50W

Voltage: 100-240V~

Particulate CADR: 480m<sup>3</sup>/hr

Formaldehyde Removal Rate: 93%

Noise: 16-51dB(A) \*Sound Pressure Level


Material: ABS Plastic

Net Weight: 6.9kg


CREATED IN CHINA

# Replacing The HEPA Filter

1. The filter reset indicator will flash continuously when your filter needs replacing.




2. Pull out the front cover then lift out the Pre-filter, Carbon and/or HEPA filter.




3. Remove the bags from the HEPA filters.



4. Insert your new HEPA/Carbon filter. Ensure the arrow on the filter is facing towards the outside of the unit.



5. After reattaching the front cover, press and hold the filter replacement indicator for 4 seconds to reset it. This resets the filter replacement indicator.



6. If you want to estimate the frequency of replacing HEPA filters based on your personal usage, please visit:

<https://smartairfilters.com/en/when-change-hepa-filter/>



Note: The filter indicator light will illuminate after your purifier has been running for approximately 1,045 hours. Decide when to replace the filters based on how frequently the purifier is used.

Want to learn more about  
Smart Air products?

Feel free to scan the QR code!



[smartairfilters.com](http://smartairfilters.com)